



LPNG-2X2-4KLM-50K-D  
LPNG-2X2-4KLM-40K-D  
LPNG-2X2-4KLM-35K-D  
LPNG-2X2-4KLM-27K-D

## LED BLACKLIT PANEL LIGHT, 100~277 VAC

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

### ELECTRICAL SPECIFICATIONS:

- Voltage: 100-277VAC, 50/60Hz
- Wattage: 40W
- Current: 1050mA
- Power factor: >0.90
- Efficacy: 90~110LM/W
- THD: <20%

### HOUSING SPECIFICATIONS:


- External driver mounted on top
- Earthquake hooks and suspension hooks pre-installed
- Operating temperature: -68°F ~ 104°F
- Lifespan: 50,000 Hrs.

### CERTIFICATIONS: UL, DLC



### DIMENSIONS:

23.82"(L) x 23.82"(H) x 1.69"(D)

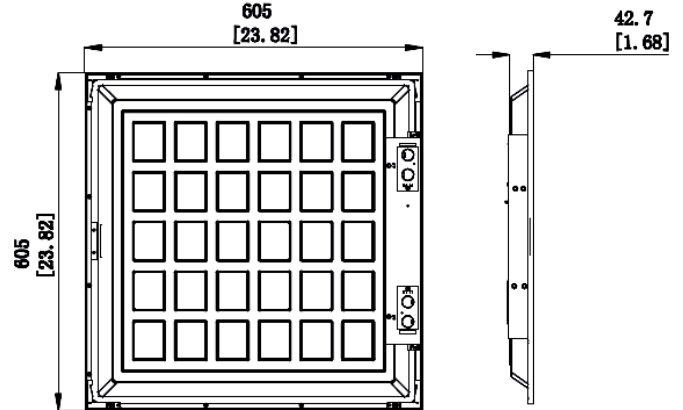

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LPNG-2X2-4KLM-50K-D	40W	100~277VAC	4400LM	5000K
LPNG-2X2-4KLM-40K-D	40W	100~277VAC	4400LM	4000K
LPNG-2X2-4KLM-35K-D	40W	100~277VAC	4200LM	3500K
LPNG-2X2-4KLM-27K-D	40W	100~277VAC	3600LM	2700K

### LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- Total lumens: 4400LM/4200LM/3600LM
- Color temperature: 5000K/4000K/3500K/2700K
- Color rendering index: >80
- Soft and wide light emitting
- No infrared rays, no ultraviolet radiation, no thermal effect
- No flickering, no humming, no RF interference

### WARRANTY: 5 years

