

# LPNG-2X2

## TECHNICAL SPECIFICATIONS:

- :: External driver mounted on top
- :: High efficiency: 105LM/W
- :: Input Voltage: AC100V-277V
- :: Fixture Operating Voltage: 36VDC
- :: Color Rendering Index: Ra>80
- :: Dimmable: 0~10V dimming
- :: Power Factor: >0.9
- :: Current (mA): 1050mA 36V DC
- :: Frequency Range: 50Hz~60Hz
- :: Total harmonic distortion: ≤20 %
- :: Operating temperature: 68°F~104°F
- :: Rated life: 50,000 hrs.
- :: 5-year warranty

B2




## FEATURES:

- :: Soft and wide light emitting
- :: No infrared rays, no ultraviolet radiation, no thermal effect
- :: No flickering, no humming, no RF interference
- :: Earthquake hooks and Suspension hooks preinstalled



Except 27K

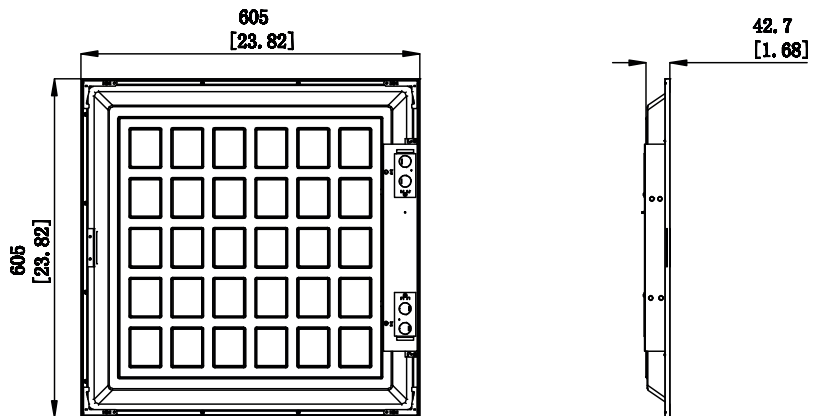

**OPTIONS**

- DAYLIGHT HARVESTING
- MOTION SENSOR
- BATTERY BACKUP

## LED BACKLIT PANEL LIGHTS (2X2)

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	DIMENSIONS
LPNG-2X2-4KLM-50K-D	40W	4200LM	5000K	23.82" x 23.82" x 1.69"
LPNG-2X2-4KLM-40K-D	40W	4200LM	4000K	
LPNG-2X2-4KLM-35K-D	40W	4200LM	3500K	
LPNG-2X2-4KLM-27K-D	40W	4200LM	2700K	