



LVE-24-MCT-BN

24" MULTI-CCT VANITY LIGHTS



Customer Name:		
Project Name:		
Note:	Type:	









This is LED Vanity Model Ideal for office, Retail Store, Showroom, Residential applications and Damp environment lighting applications.

4 1/5"(H) x 24" (W) x 6"(D)

-eatures

- Steel base with white powder coated
- Finish: Brushed Nickel
- **Durable Die-cast Aluminum**

- Lens Type: Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

Voltage: 120V AC 50/60Hz

Wattage: 17W Power Factor: >0.95

Total Harmonic Distortion: ≤ 20 %

Efficacy: 78 LPW

Mechanical:

- Steel Base With White Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- IP20, Indoor Use only
- Operating Temperature: -22°F to 104°F

Lighting:

- Dimming: TRIAC Dimming (Dimmable Down to 5%Compatible with Traic and ELV Dimmers)
- 120V Dimming Quantum Driver
- Total Lumens: 1340LM
- Color Temperatures: 3000K / 3500K / 4000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 90
- 50,000 Hours Rated Life
- 5-Year Warranty
- Beam Angle: 104.8°(H) x 100.5°(V)

Applications:

Ideal for Office, Retail Store, Showroom, Residential Applications and Damp Environment Lighting **Applications**

Other models:

• 25W | 2080LM | LVE-36-MCT-BN

• 34W | 2740LM | LVE-48-MCT-BN













Photometrics: LVE-24-MCT-BN



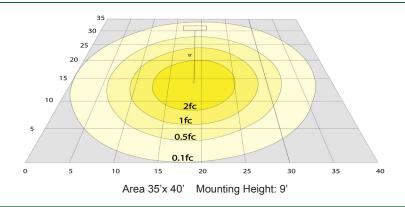

Other Views:







Back View

Side View Front View

Performance Table: LVE-24-MCT-BN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVE-24-MCT-BN	17W	120V	1340LM	3000K 3500K 4000K	B1-U3-G1	78

Sample Ordering

Model Size Color Temp. Housing

LVE = 24 = MCT = BN

Example:

1. LVE-24-MCT-BN

(For LVE 17W MCT ixture 120V)

Other Model: LVE-48-MCT-BN







Side View Front View Back View