


DIMENSIONS:

46.8"(L) x 6.5"(W) x 2.5"(H)

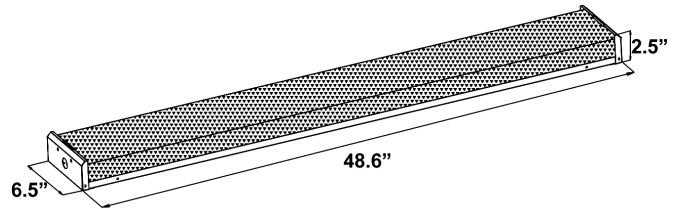

- WAS-4FT-42W-35K-D
- WAS-4FT-42W-40K-D
- WAS-4FT-42W-50K-D

LED STANDARD WRAP-AROUND FIXTURE

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 100-277VAC
- Wattage: 42W
- Power factor: >0.95
- Efficacy: 104LM/W

HOUSING SPECIFICATIONS:

- Die-formed heavy gauge cold rolled steel with powder coated white
- Steel Thickness: 24 Gauge
- Optional Driver
- Installation: Ceiling-mounted
- Ambient Temperature: -22°F ~ 107°F

CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
WAS-4FT-42W-35K-D	42W	100~277VAC	4400LM	3000K
WAS-4FT-42W-40K-D	42W	100~277VAC	4400LM	4000K
WAS-4FT-42W-50K-D	42W	100~277VAC	4400LM	5000K

LIGHTING SPECIFICATIONS:

- Dimming: 0~10 dimmable
- Lens: Opal Polycarbonate
- Light Source: High-lumen LEDs
- Total lumens: 4400LM
- Color temperature: 3000K/4000K/5000K
- Color rendering index: >82

WARRANTY: 5 years

