




DIMENSIONS:

18.25"(W) x 9"(H) x 9.25"(D)



Non-cutoff optics with wide forward throw distribution is ideal for extended spacing to mounting height ratio



1/2" threaded hubs located on the back, rear, and side of housing for greater mounting versatility. Ideal for 1/2" photoelectric control mounting

WML-120CW-LG WML-120NW-LG WML-120WW-LG

LED NON-CUTOFF WALL PACK

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas. Provides crisp, directional light.

ELECTRICAL SPECIFICATIONS:

- Input Wattage: 127W
- Input Voltage: 120-277VAC 50/60Hz
- Input Current: 1.2A Max
- Other wattages: 30W, 50W, 60W, 80W
- Power factor: >0.9
- Efficacy: 95 LM/W

HOUSING SPECIFICATIONS:

- Die-cast aluminum with powder coat finish (Dark Bronze)
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- Borosilicate glass lens will not yellow or fade

CERTIFICATIONS: UL



LIGHTING SPECIFICATIONS:

- LED type/brand: SMD 3030/ Philips Lumileds LEDs
- Total lumens: 12000 LM
- LED Quantity: 176 pieces
- Color temperature: 3000K, 4000K and 5000K
- Color rendering index: >80
- Beam angle: 90°

WARRANTY: 5 years

| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP |
|--------------|-------|-------------|----------|------------|
| WML-120CW-LG | 127W | 120~277V AC | 12000 LM | 5000K |
| WML-120NW-LG | 127W | 120~277V AC | 12000 LM | 4000K |
| WML-120WW-LG | 127W | 120~277V AC | 12000 LM | 3000K |



WML-120CW-LG WML-120NW-LG WML-120WW-LG

LED NON-CUTOFF WALL PACK


CERTIFICATIONS: UL



| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP |
|--------------|-------|-------------|----------|------------|
| WML-120CW-LG | 127W | 120~277V AC | 12000 LM | 5000K |
| WML-120NW-LG | 127W | 120~277V AC | 12000 LM | 4000K |
| WML-120WW-LG | 127W | 120~277V AC | 12000 LM | 3000K |

PHOTOMETRICS:

Spectral Power Distribution & Chromaticity Diagram

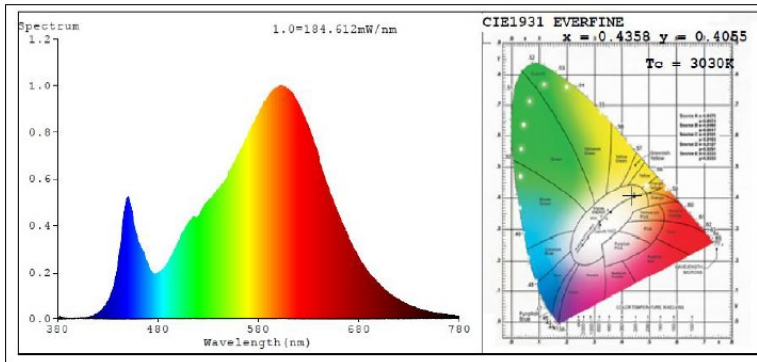


Illuminance Plots


| | Illuminance at a Distance | | |
|---------|---------------------------|------------|----------|
| | Center Beam fc | Beam Width | |
| 17.0ft | 13.63 fc | 36.6 ft | 31.0 ft |
| 34.0ft | 3.41 fc | 73.2 ft | 61.9 ft |
| 51.0ft | 1.51 fc | 109.8 ft | 92.9 ft |
| 68.0ft | 0.85 fc | 146.3 ft | 123.9 ft |
| 85.0ft | 0.55 fc | 182.9 ft | 154.8 ft |
| 102.0ft | 0.38 fc | 219.5 ft | 185.8 ft |

■ Vert. Spread: 94.2°
■ Horiz. Spread: 84.7°

ISOLUX DIAGRAM

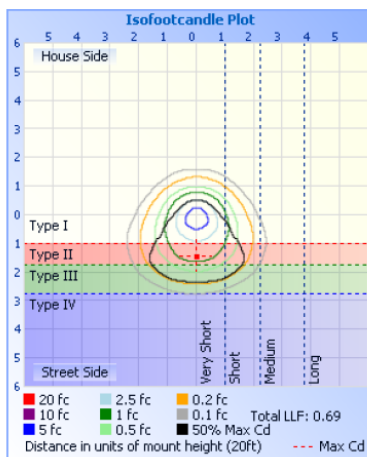

Photometric Data

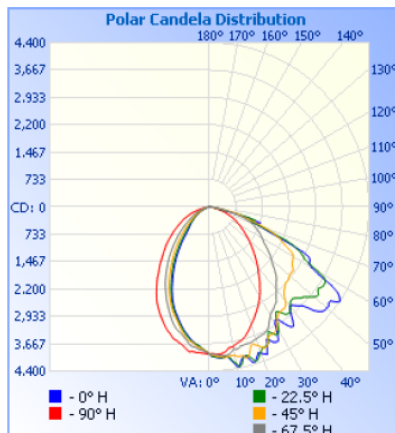

ISOCANDELA DIAGRAM

