

JOB NAME: \_\_\_\_\_


DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_



## DIMENSIONS:

11.4"(L) x 4.5"(W) x 3.5"(H)

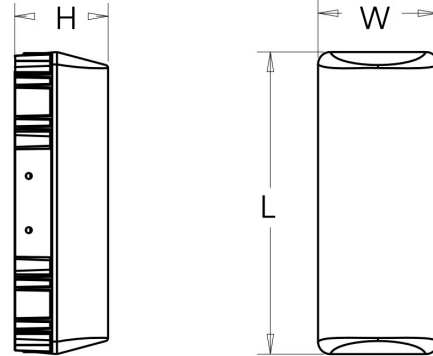

**WMV-20W-50K**  
**WMV-20W-40K**  
**WMV-20W-30K**

## LED VANDAL-PROOF WALL PACK

Ideal for one-for-one replacement of site lighting systems such as HID and fluorescent. Applications include alleys, loading docks, doorway, pathway and parking areas.

### ELECTRICAL SPECIFICATIONS:

- Voltage: 100~277 VAC /60 Hz
- Wattage: 20 W
- Power factor: 0.90
- Efficacy: 96 LM/W

### HOUSING SPECIFICATIONS:

- ADC12 Aluminum heat sink
- Outdoor Powder Coat
- Vandal resistant housing
- Operating temperature: -40°F to 104°F
- Lifespan: 70,000 hr.
- IP Rating: IP64

### CERTIFICATIONS: UL, DLC




PHILIPS LUMILEDS



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
WMV-20W-50K	20W	100~277 V AC	1920 LM	5000K
WMV-20W-40K	20W	100~277 V AC	1920 LM	4000K
WMV-20W-30K	20W	100~277 V AC	1920 LM	3000K

## PHOTOMETRICS:

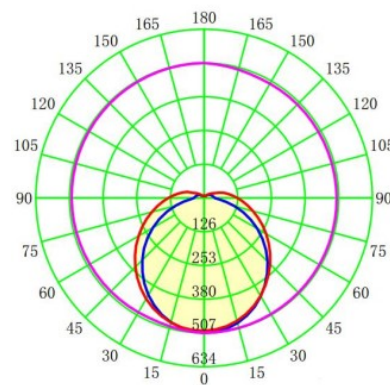

## LIGHTING SPECIFICATIONS:

- Lens: Optical Lens
- Total lumens: 1920 LM
- Color temperature: 5000K/4000K/3000K
- Color rendering index: >70

## WARRANTY: 7 years

