


Features

- Excellent color rendering (96+ CRI)
- Color temperatures from 2400K to 4000K
- 200-310 lumens per foot performance
- Consumes only 4.6 watts per foot
- Dimmable with ELV dimmers
- Cuttable every 3.94"
- 22 foot max run
- (IP54) unjacketed or (IP65) jacketed versions
- 50,000 hours rated life

Available CCT



Control Options

- Trulux Single Color Controls
Requires Adaptive Driver + Trulux Receiver
- Primary Side Dimming
Requires Standard Dimmer + Adaptive Driver

Listing / Ratings




TRULUX™ High Output - 24V

Our most popular tape light option, the High Output series is a go to for most applications in part to the great lumen output with a slightly longer max run. With up to 310 lumens a foot and a max run up to 22 feet, High Output tape light provides a perfect blend of lumens, light quality, and color temperature options for multiple applications.

Technical Information

Series	HTL
Input Voltage	24V
CCT	2400K / 2700K / 3000K / 4000K
CRI	96+
Wattage	4.6W per ft
Lumens	Up to 310Lm per ft
Max Run	22 feet
Cuttable	Every 3.94"
IP Rating	IP54 (unjacketed) / IP65 (jacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

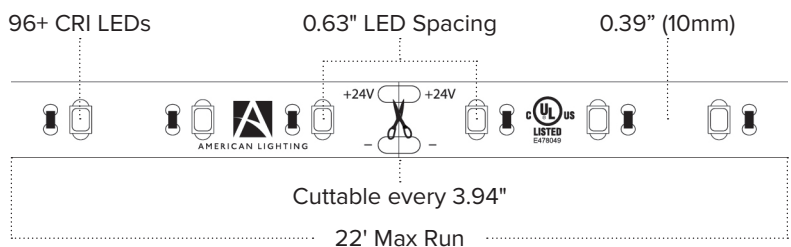



2400K Deluxe Warm White 4.6W per ft / up to 285Lm per ft	2700K Ultra Warm White 4.6W per ft / up to 285Lm per ft	3000K Warm White 4.6W per ft / up to 300Lm per ft	4000K White 4.6W per ft / up to 310Lm per ft
---	--	--	---

16.4ft Reels

	HTL-UWX (16.4' / 285Lm/ft)	HTL-UWW (16.4' / 285Lm/ft)	HTL-WW (16.4' / 300Lm/ft)	HTL-WH (16.4' / 310Lm/ft)
	Unavailable	HTL65-UWW (16.4' / 200Lm/ft)	HTL65-WW (16.4' / 220Lm/ft)	Unavailable

100ft Reels

	Unavailable	HTL-UWW-100 (100' / 285Lm/ft)	HTL-WW-100 (100' / 300Lm/ft)	Unavailable
--	-------------	--------------------------------------	-------------------------------------	-------------

Custom Cut

	HTL-UWX-CC (285Lm/ft)	HTL-UWW-CC (285Lm/ft)	HTL-WW-CC (300Lm/ft)	HTL-WH-CC (310Lm/ft)
--	------------------------------	------------------------------	-----------------------------	-----------------------------

HTL (IP54) 16.4ft Reels include: Attached 3ft lead wires / (3) TL-CONKIT / (3) TL-BKS
 HTL65 (IP65) 16.4ft Reels include: (1) Male + (1) Female Connector / (3) TL-CONKIT
 HTL (IP54) 100ft Reels include: Attached 3ft lead wires / (5) TL-CONKIT / (5) TL-BKS
 Custom Cut: Please allow up to 2-4 weeks for custom cut order processing and delivery

Building a Single Color Trulux System?

See pages (28-29) for compatible single color Trulux controllers & accessories

Trulux Single Color Accessories

Trulink 4-in-1 Connector Kit TL-CONKIT	Trulink 4-in-1 Connector Block TL-BLKS (Qty 10)	HD Power Feed (IP54) TL-2PWR-HD	HD Splice (IP54) TL-2SPL-HD	HD Linking Cable (IP54) TL-2JUMP6-HD (6") TL-2JUMP24-HD (24")	Linking Cable (IP65) TL-2JUMP65-5 (6") TL-2JUMP65-1 (12") TL-2JUMP65-2 (24")

Trulux Controller Set-up

	+		+		+	
Push Dial Controller (Single zone)		Adaptive LED Driver (30W / 60W / 96W / 192W / 288W)		Trulux RF Receiver (Required per zone)		Trulux Tape Light

Primary Side Dimming Set-up

	+		+	
Standard Dimmer		Adaptive LED Driver (30W / 60W / 96W / 192W / 288W)		Trulux Tape Light