


LVA-24-MCT5-BN 24" MULTI-CCT VANITY LIGHTS



Customer Name:				
Project Name:				
Note:	Type:			







24"(W) x 5 3/4"(H)



Selection:



This is LED Vanity Model Ideal for office, Retail Store, Showroom, Residential applications and Damp environment lighting applications.

# **Features**

- Corrosion and Heat Resistance Powder Coated
- · Finish: Brushed Nickel
- Durable Die-cast Aluminum

- Lens Type: Clear glass lens, One Side with White Silk
- Screen Printing
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

# **Technical Specifications**

#### **Electrical:**

Voltage: 120VAC 50/60Hz

Wattage: 20W

Power Factor: >0.95

Total Harmonic Distortion: ≤ 20 %

Efficacy: 70 LPW

#### Mechanical:

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- IP20, Indoor Use only
- Operating Temperature: -22°F to 104°F
- 5-Year Warranty

# Lighting:

- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible with Traic and ELV Dimmers)
- Total Lumens: 1400LM
- Color Temperatures: 2700K/ 3000K/3500K/4000K/5000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 90
- 50,000 Hours Rated Life
- Beam Angle: 104.8°(H) x 100.5°(V)

# **Applications:**

 Ideal for Office, Retail Store, Showroom, Residential Applications and Damp Environment Lighting Applications

• 30W | 2100LM | LVA-36-MCT5-BN














### Photometrics: LVA-24-MCT5-BN





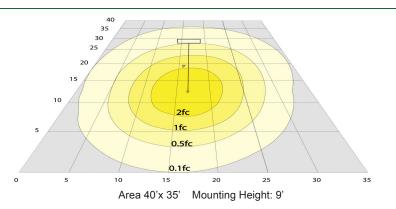

BUD Rating: B1-U3-G1

**Other Views:** 







Side View Front View **Back View** 

### Performance Table: LVA-24-MCT5-BN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVA-24-MCT5-BN	20W	120V	1400LM	2700K 3000K 3500K 4000K 5000K	B1-U3-G1	70

# Sample Ordering

Model	Size	Color Temp.	Housing
Model	SIZE	Color reilip.	Housing



#### **FACTORY-INSTALLED OPTIONS:**



OPT-EM-FM1INT

# **Factory-Installed Options:**

Blank = No Option For Accessories

OPT-EM-FM1INT= INTERNAL EMERGENCY BACKUP BATTERY

## **Example:**

1. LVA-24-MCT5-BN 2. LVA-24-MCT5-BN

OPT-EM-FM1INT

(For LVA 20W MCT5 fixture 120V)

(For LVA 20W MCT5 fixture 120V) (INTERNAL EMERGENCY BACKUP BATTERY)

Other Model: LVA-36-MCT5-BN







Side View Front View Back View